

Tile Surround

Step by step installation guide for timber floors



Creative Drain Solutions™

Image of installed final product

Disclaimer: These drawings are the intellectual property of Creative Drain Solutions. This information is indicative only. Creative Drain Solutions accepts no liability arising from the use of this information.

Creative Drain **Solutions**

Ph: (03) 9758 0588

createdrainsolutions.com.au

Installation Guide

These installation details are intended to be used as a guide only; we advise specific projects follow engineering advice and Australian Standards.

Required for installation

Tools


- Marker
- Drill / Screw Driver
- Scotch brite
- Clean cloths
- Scraper
- Brush
- Paint brush or roller
- Caulking gun
- V-notch or Square notch trowel.
- MDF Spacer or alternate
- Roller tray
- Bucket

Materials

- Stainless steel screws
- Solvent or recommended cleaner
- Selected primer
- Waterproofing compound
- Adhesive / Sealer
- Mortar
- Selected tiles
- Color matched grout
- Color matched tile silicone



Creative Drain Solutions™

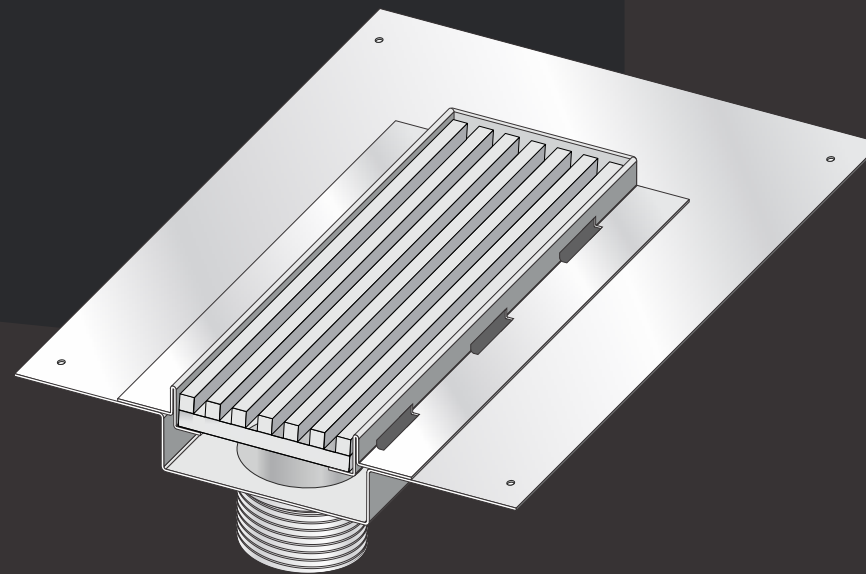


Disclaimer: These drawings are the intellectual property of Creative Drain Solutions. This information is indicative only. Creative Drain Solutions accepts no liability arising from the use of this information.



Creative Drain Solutions™

S T E P

1

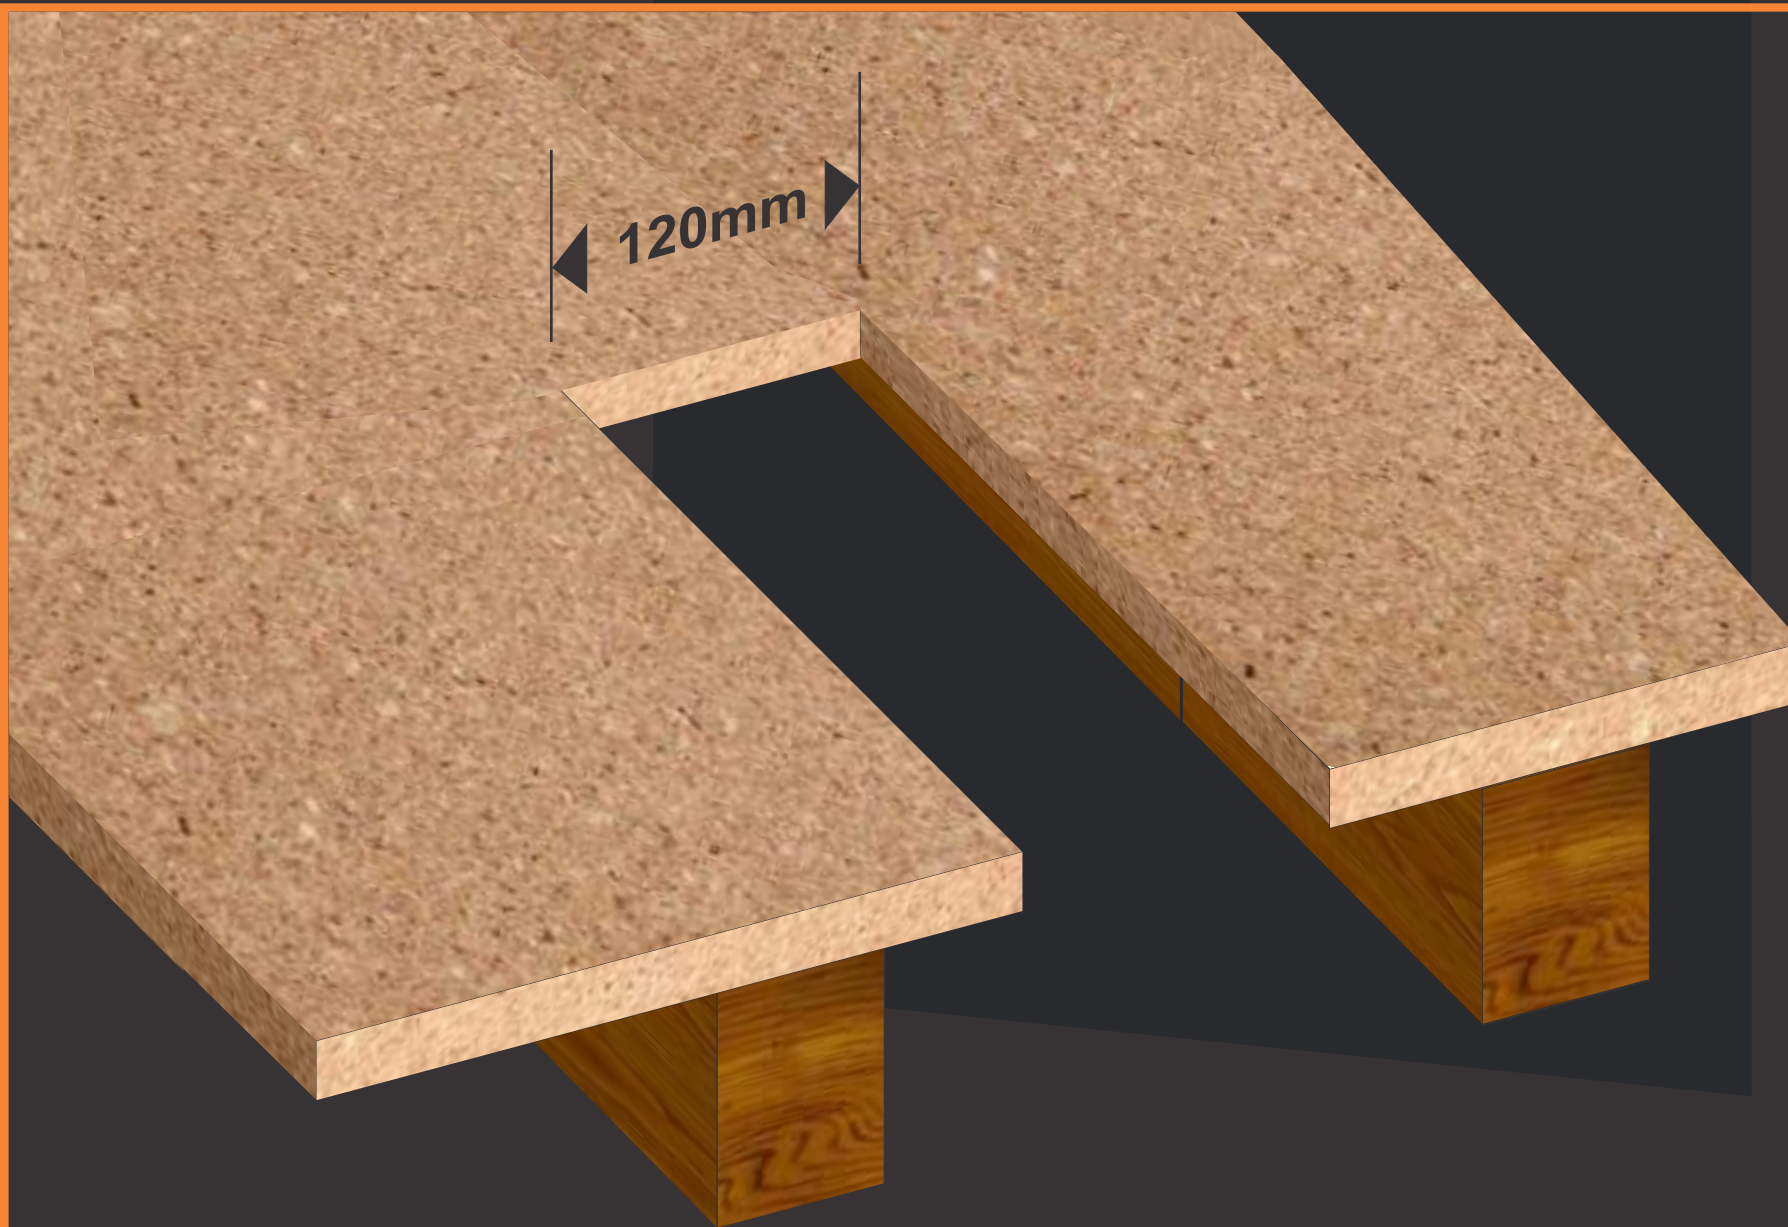

Setup floor area with a 120mm wide rebate.

Disclaimer: These drawings are the intellectual property of Creative Drain Solutions. This information is indicative only. Creative Drain Solutions accepts no liability arising from the use of this information.

Creative Drain **Solutions**

Ph: (03) 9758 0588


creativedrainsolutions.com.au



Creative Drain Solutions™

STEP

2

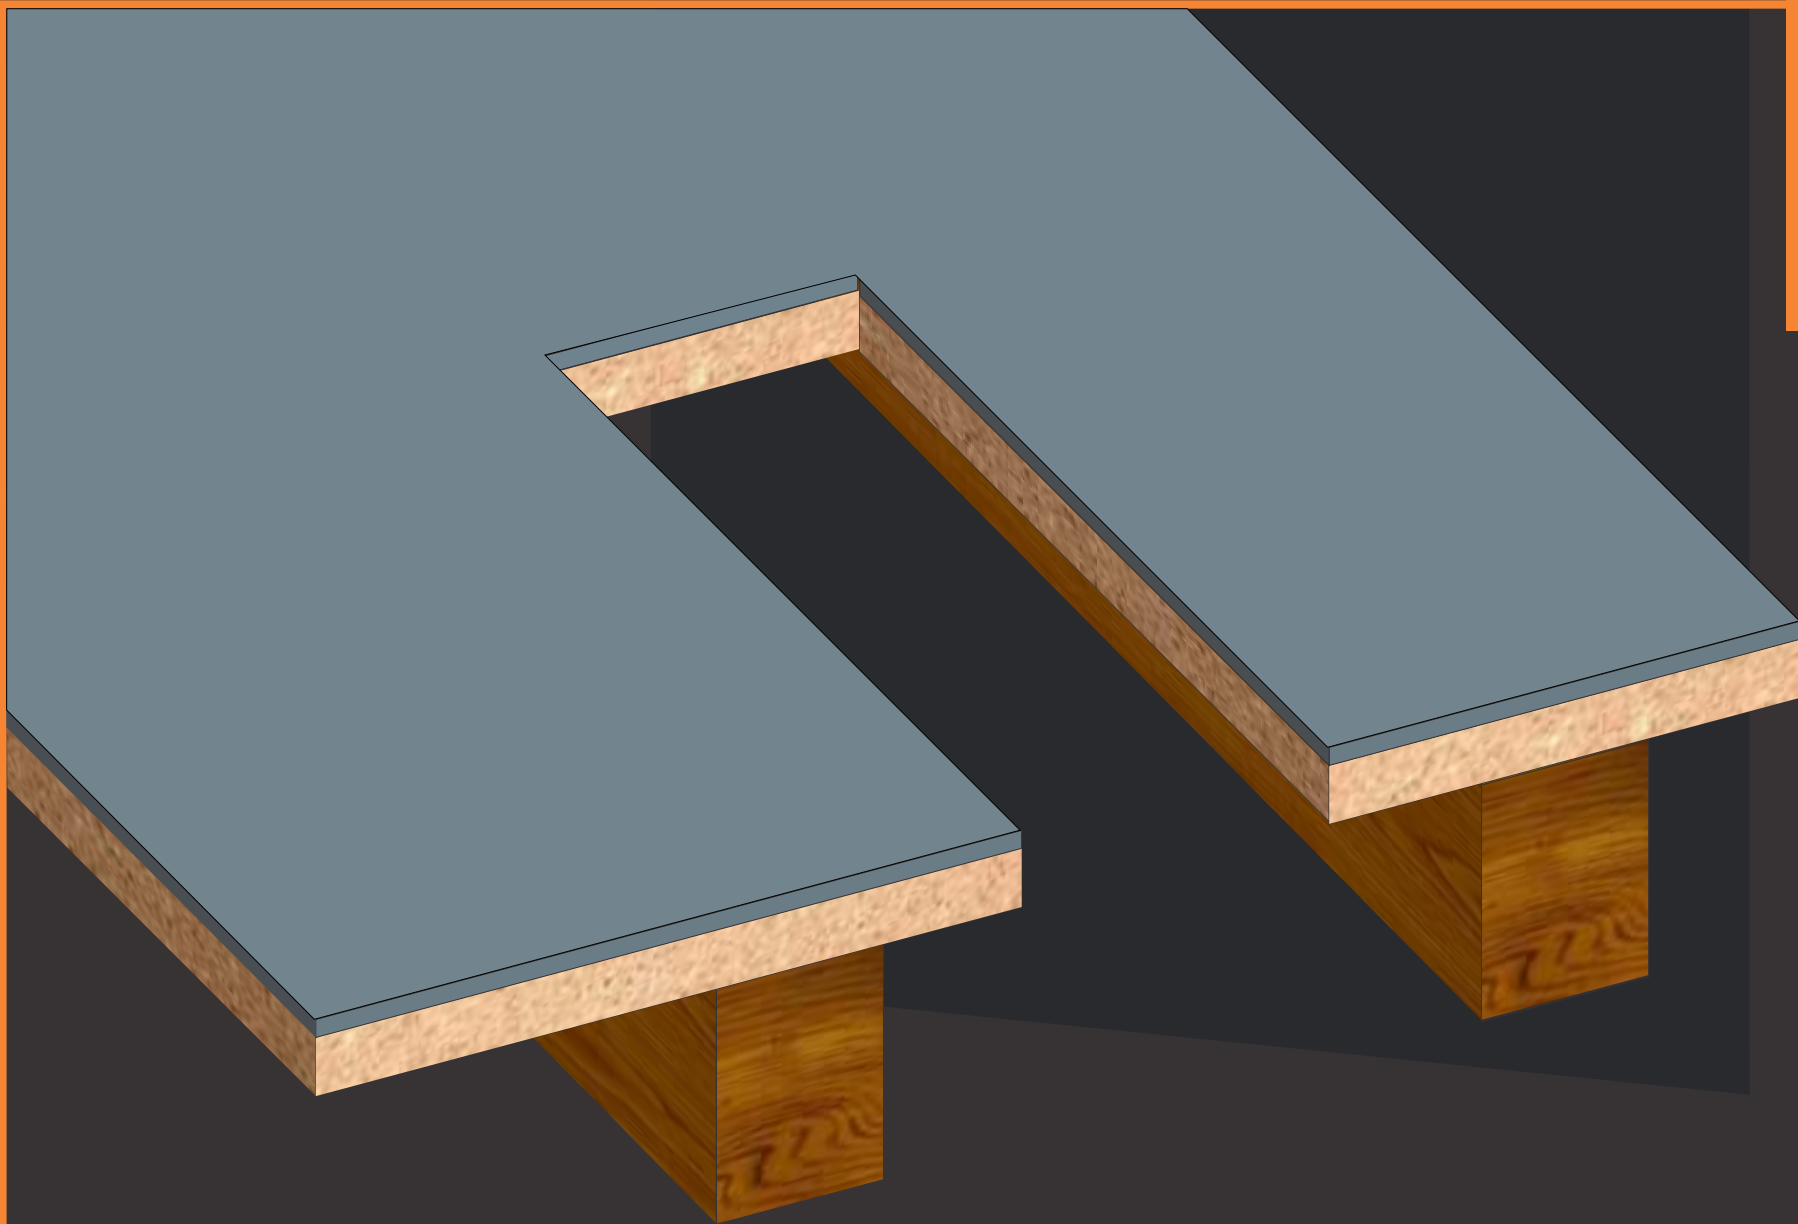

Install ceramic tile underlay to manufacturers specifications.

Disclaimer: These drawings are the intellectual property of Creative Drain Solutions. This information is indicative only. Creative Drain Solutions accepts no liability arising from the use of this information.

Creative Drain **Solutions**

Ph: (03) 9758 0588


creativedrainsolutions.com.au



Creative Drain Solutions™

STEP

3

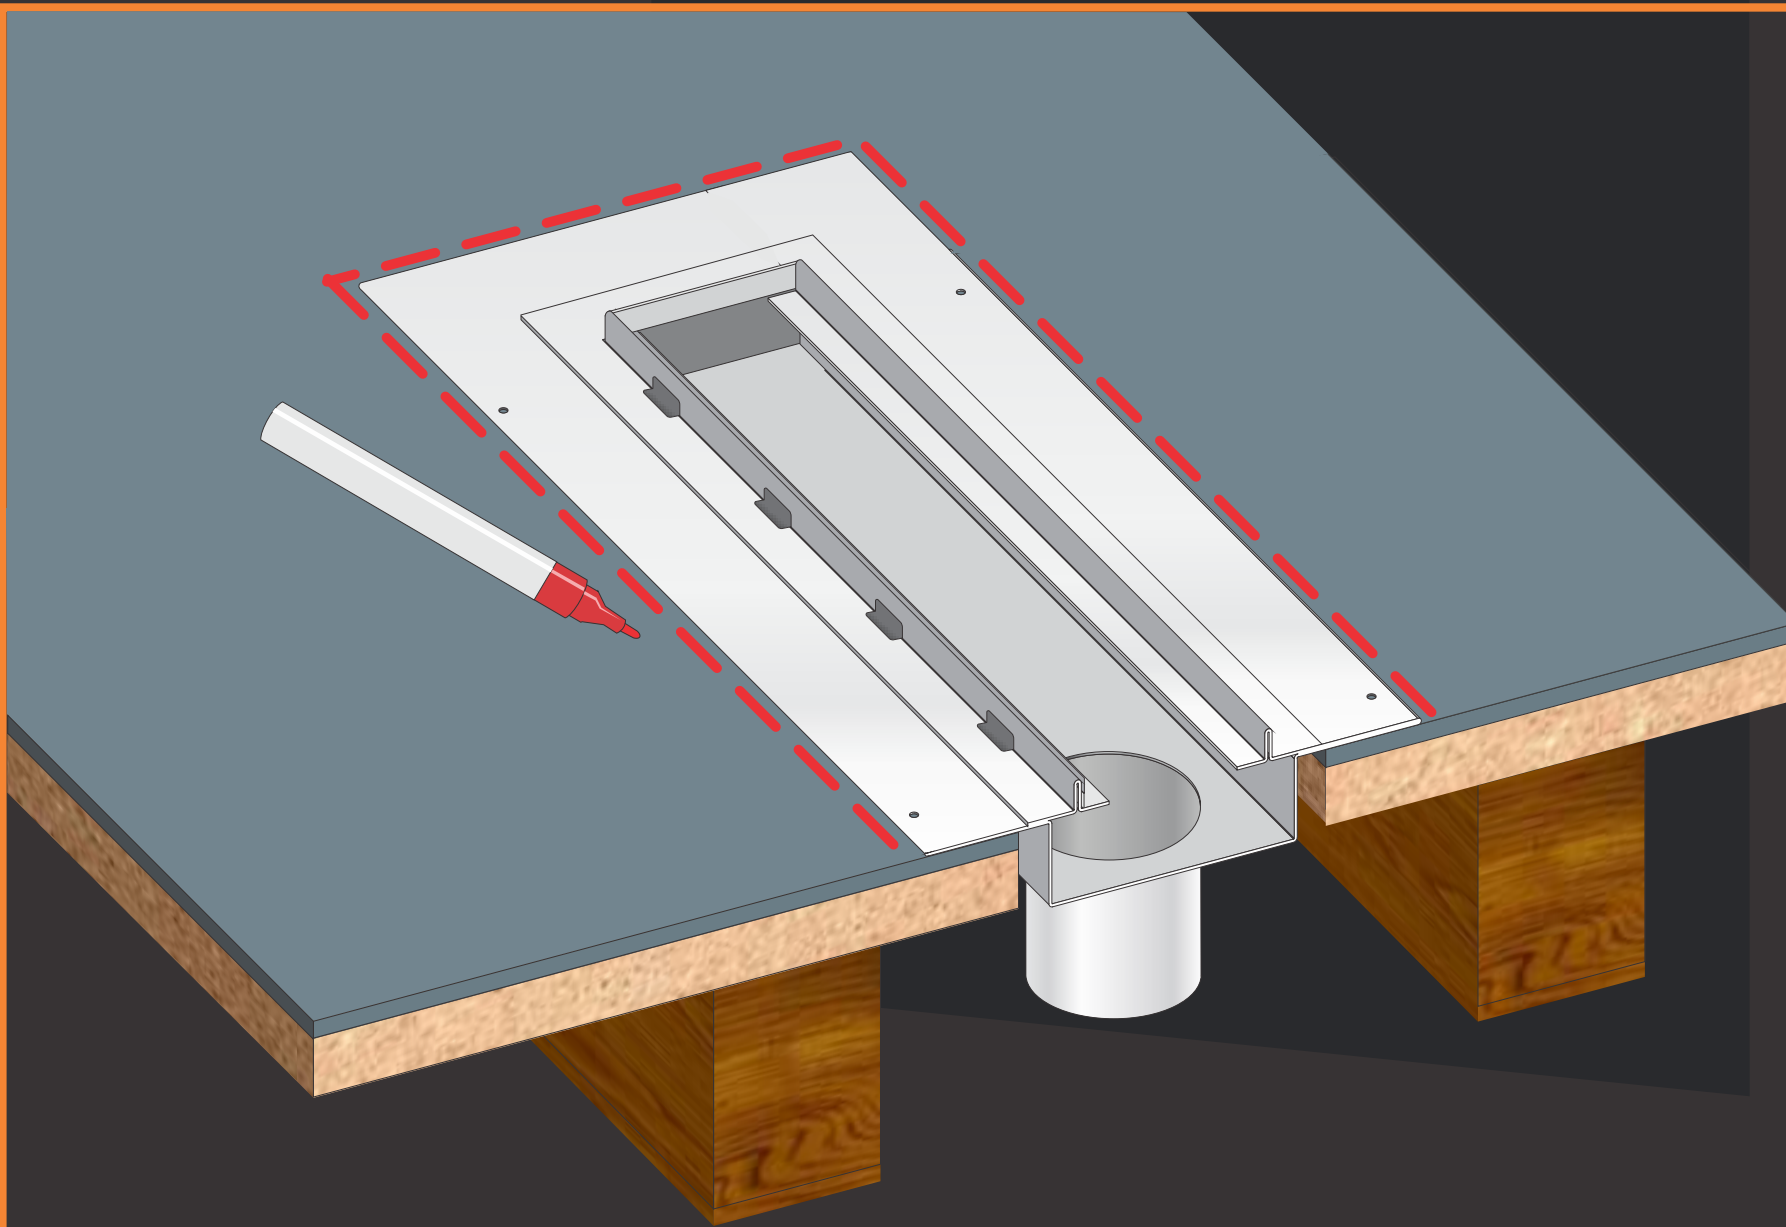

Temporarily place drain channel in position and mark extremities.

Disclaimer: These drawings are the intellectual property of Creative Drain Solutions. This information is indicative only. Creative Drain Solutions accepts no liability arising from the use of this information.

Creative Drain **Solutions**

Ph: (03) 9758 0588


creativedrainsolutions.com.au



Creative Drain Solutions™

STEP

4

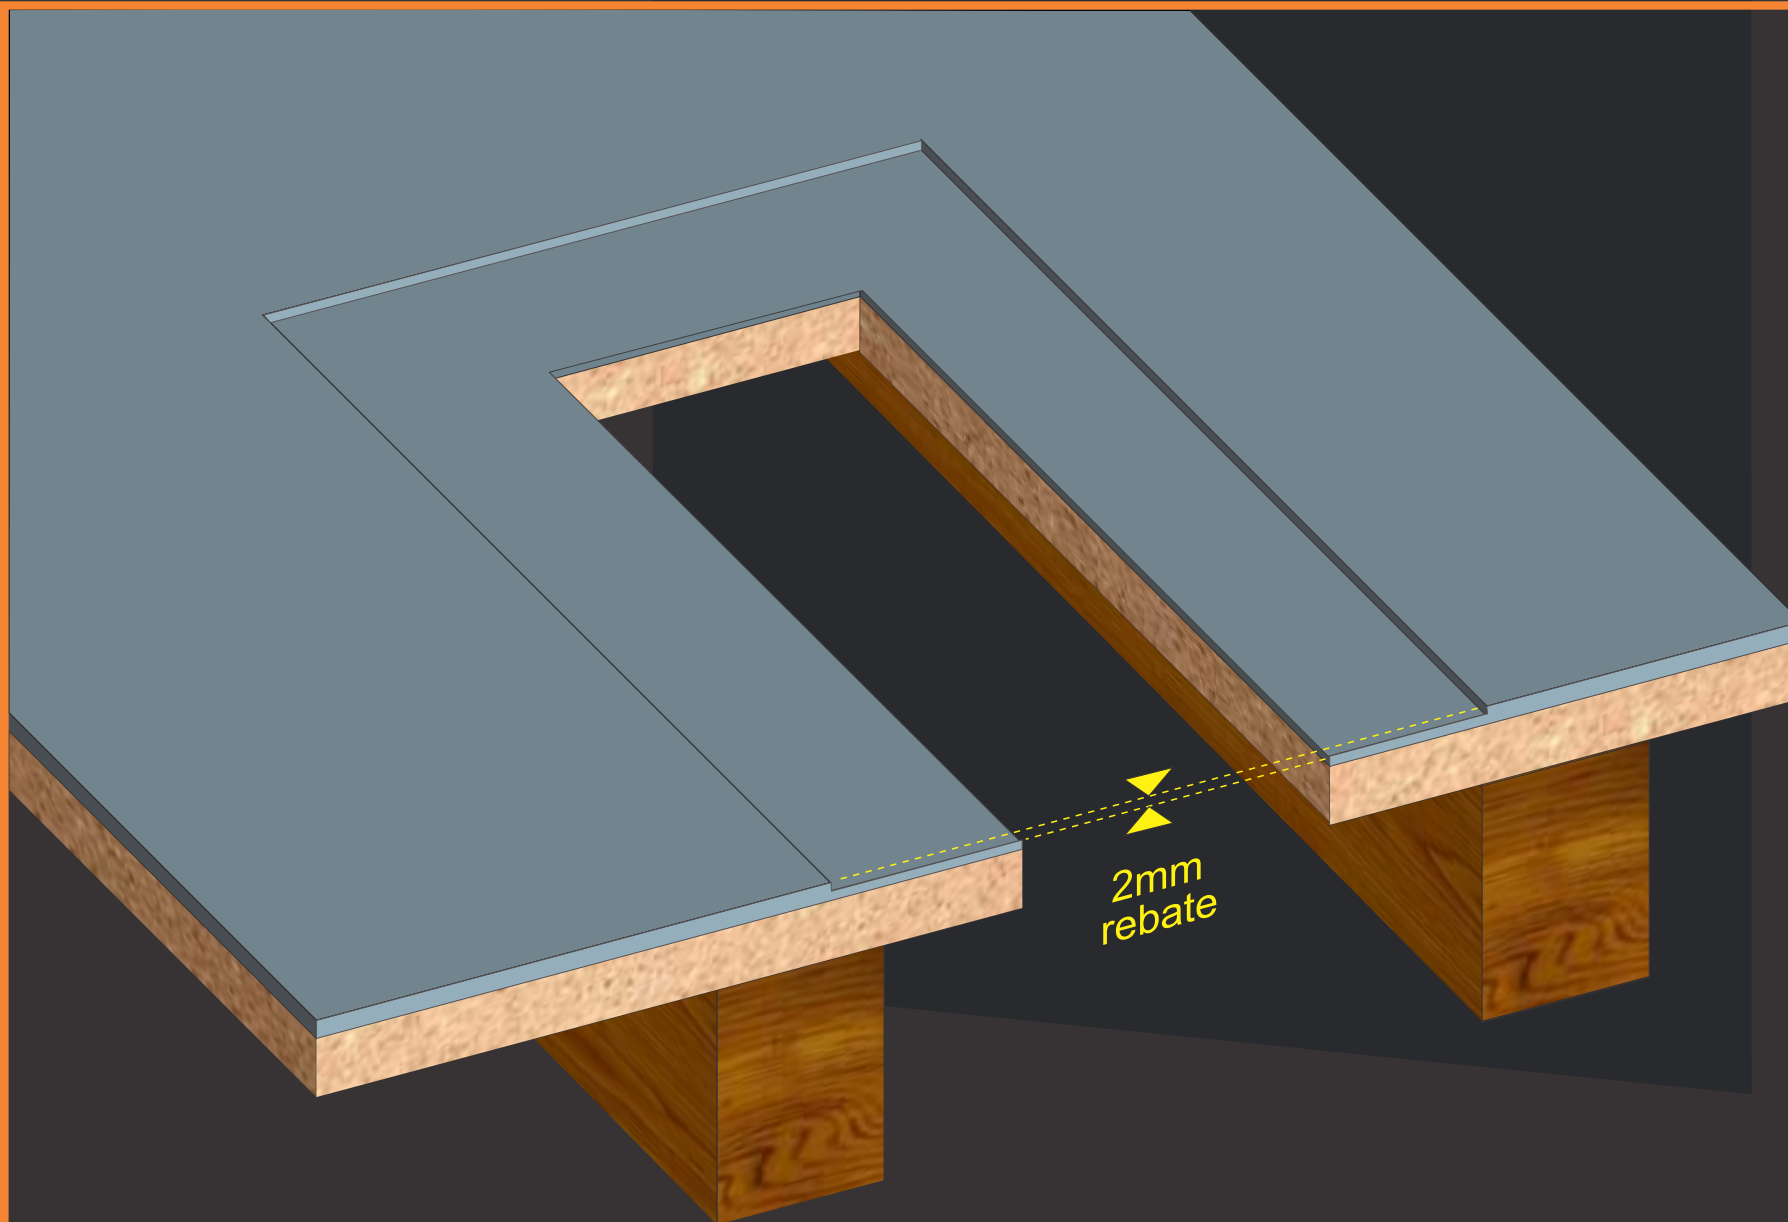


Create a 2mm rebate along the marked extremities to allow for the drain floor flashing to sit into.

Disclaimer: These drawings are the intellectual property of Creative Drain Solutions. This information is indicative only. Creative Drain Solutions accepts no liability arising from the use of this information.

Creative Drain **Solutions**

Ph: (03) 9758 0588

creativedrainsolutions.com.au

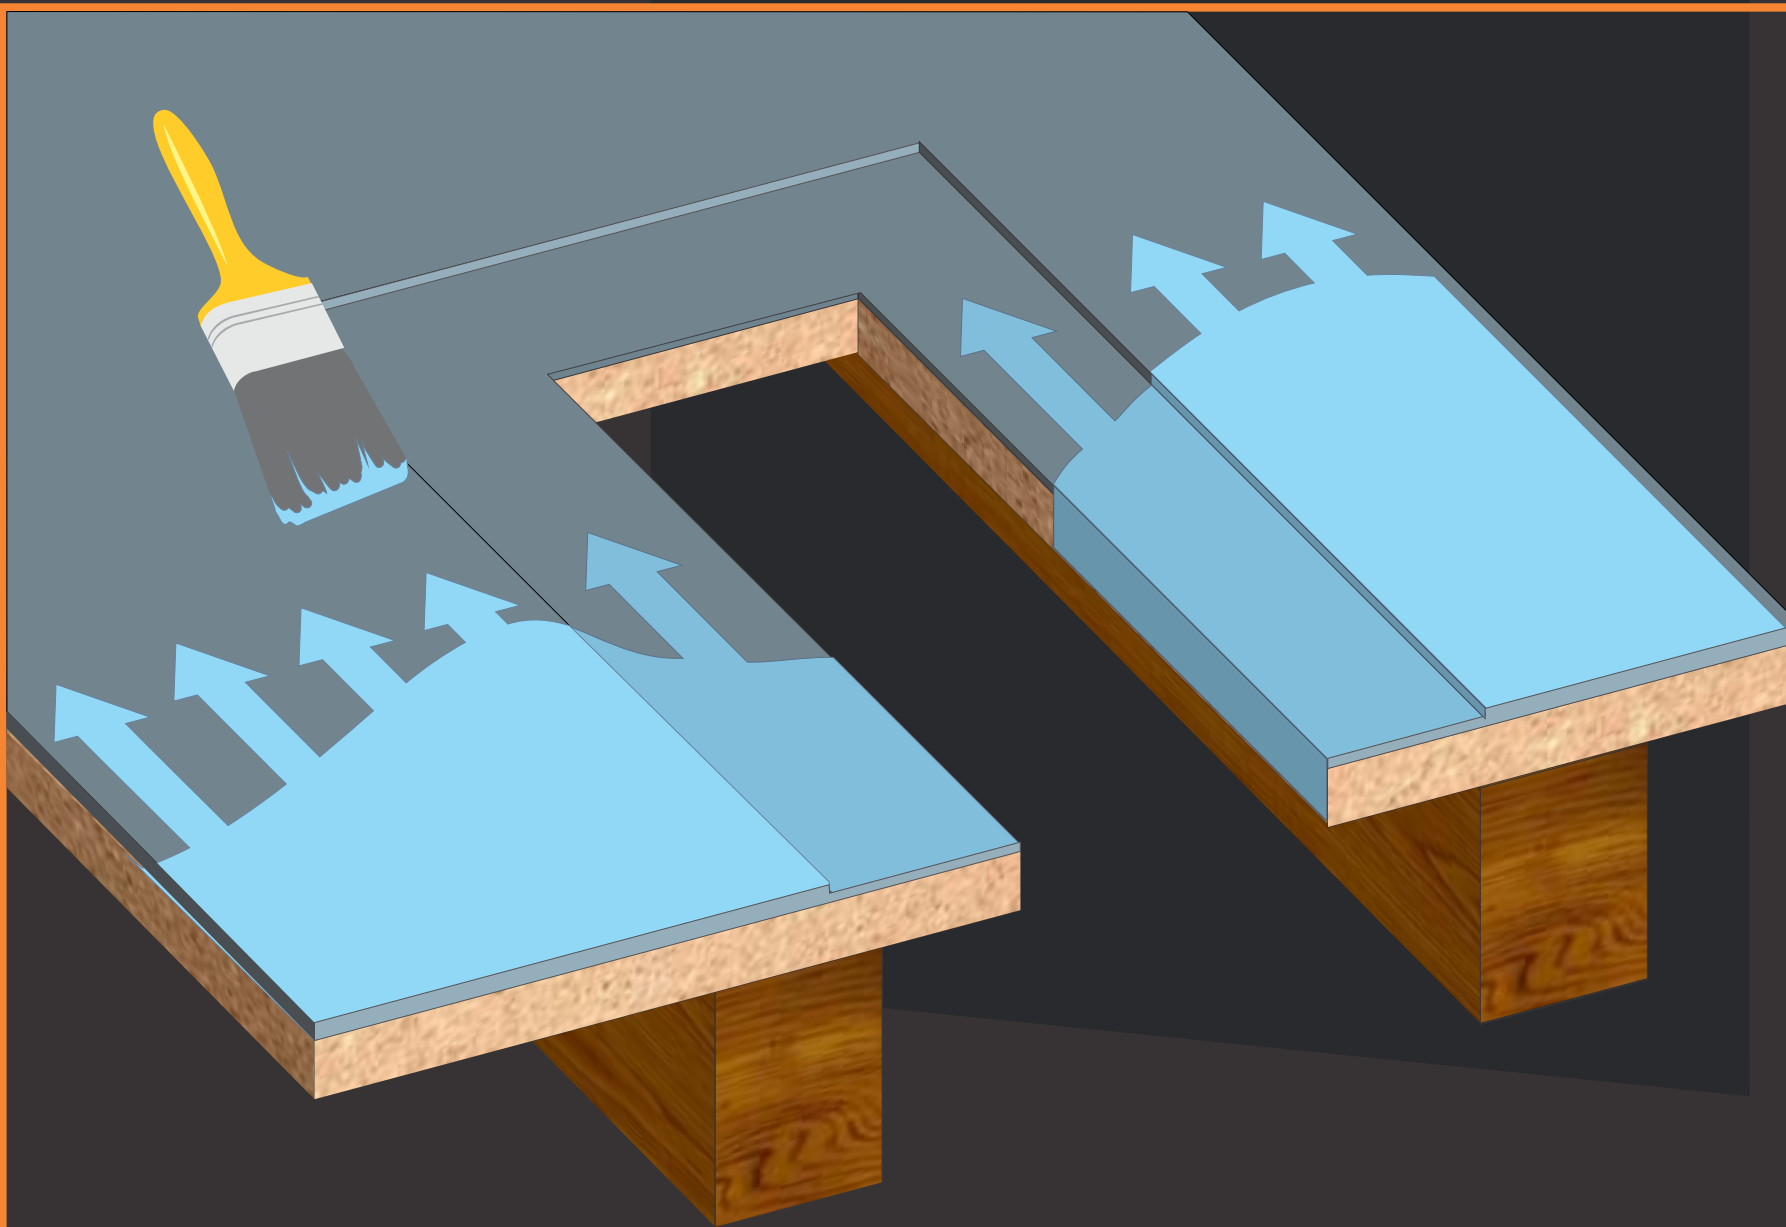

Creative Drain Solutions™

STEP

5

Clean entire floor area, apply a suitable surface primer and then apply a propriety waterproofing compound. ie Acrylic or Polyurethane compound.

Disclaimer: These drawings are the intellectual property of Creative Drain Solutions. This information is indicative only. Creative Drain Solutions accepts no liability arising from the use of this information.

Creative Drain **Solutions**

Ph: (03) 9758 0588


creativedrainsolutions.com.au



Creative Drain Solutions™

S T E P

6

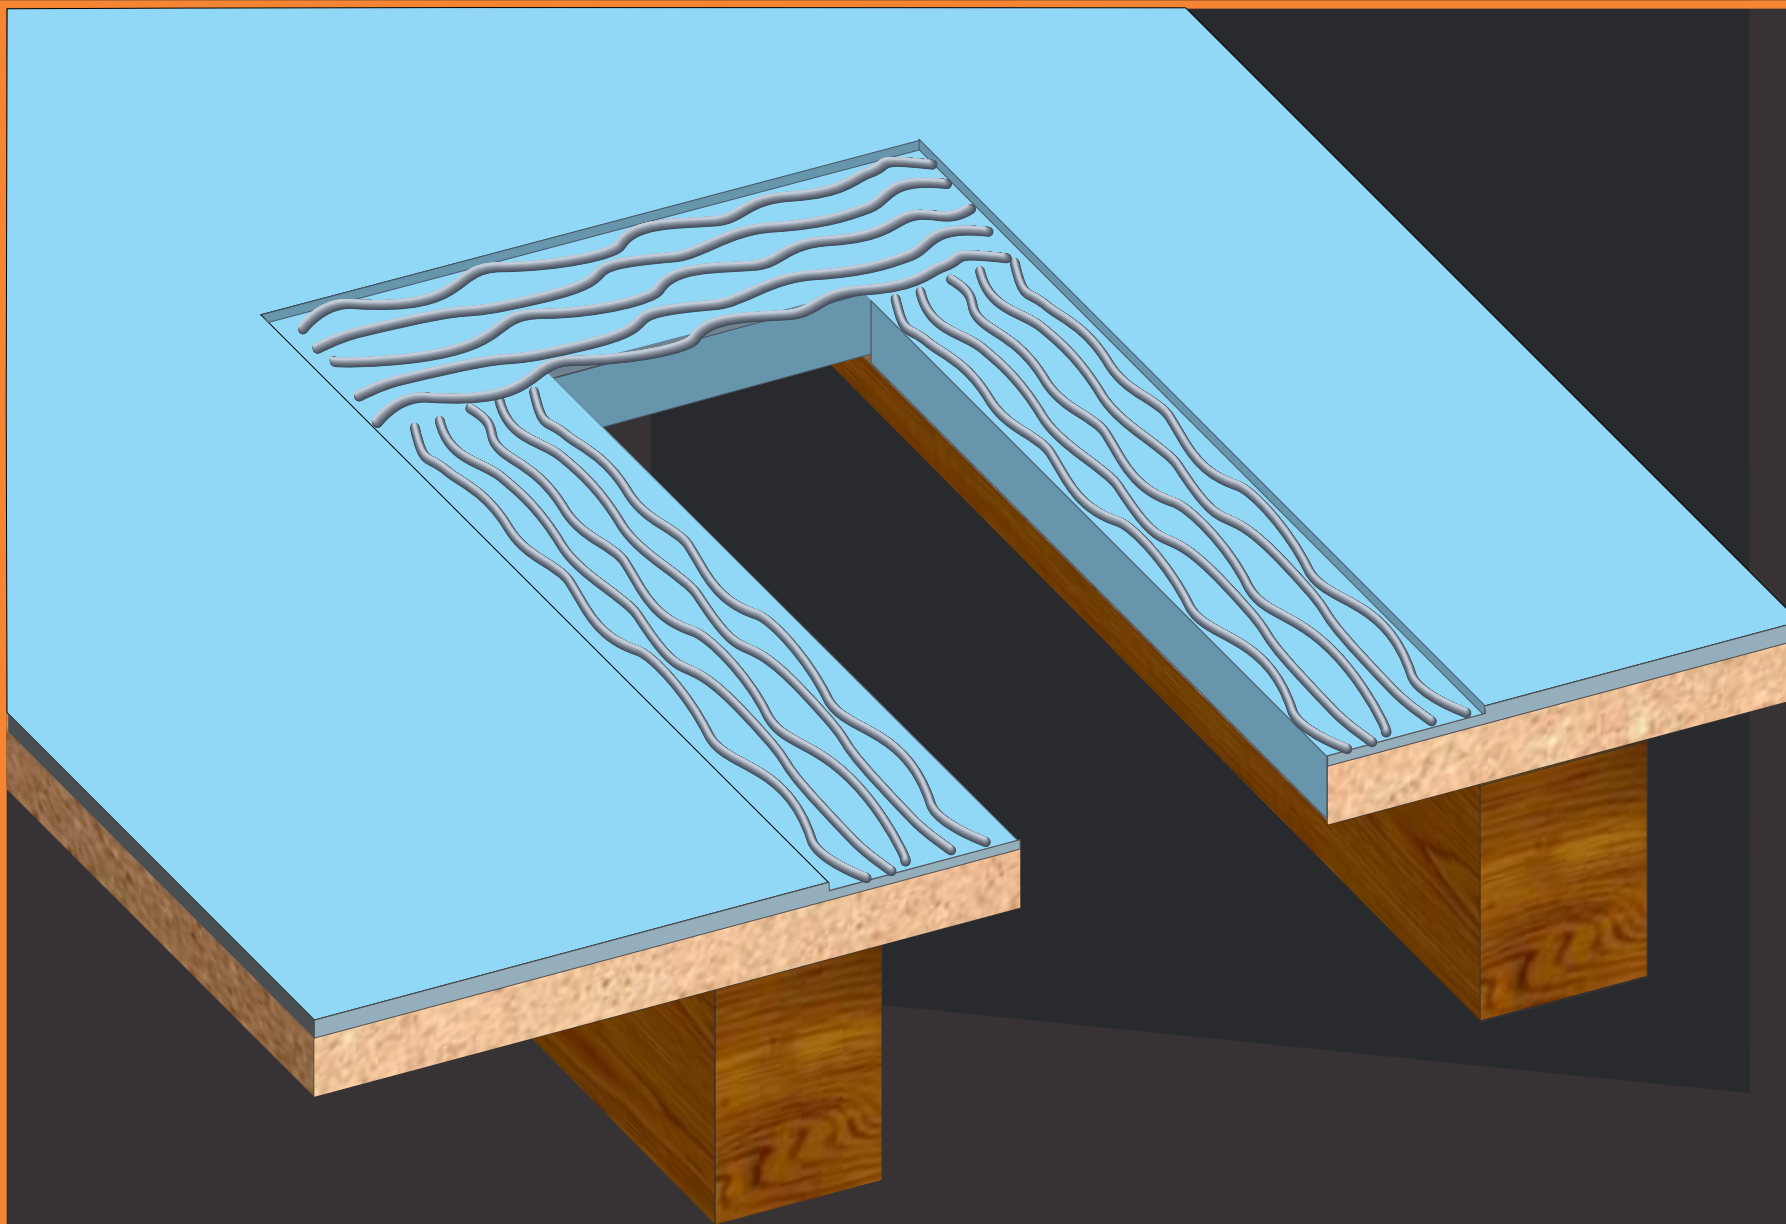

Apply a Polyurethane adhesive/sealant with in the rebated area.

Disclaimer: These drawings are the intellectual property of Creative Drain Solutions. This information is indicative only. Creative Drain Solutions accepts no liability arising from the use of this information.

Creative Drain **Solutions**

Ph: (03) 9758 0588


creativedrainsolutions.com.au



Creative Drain Solutions™

STEP

7

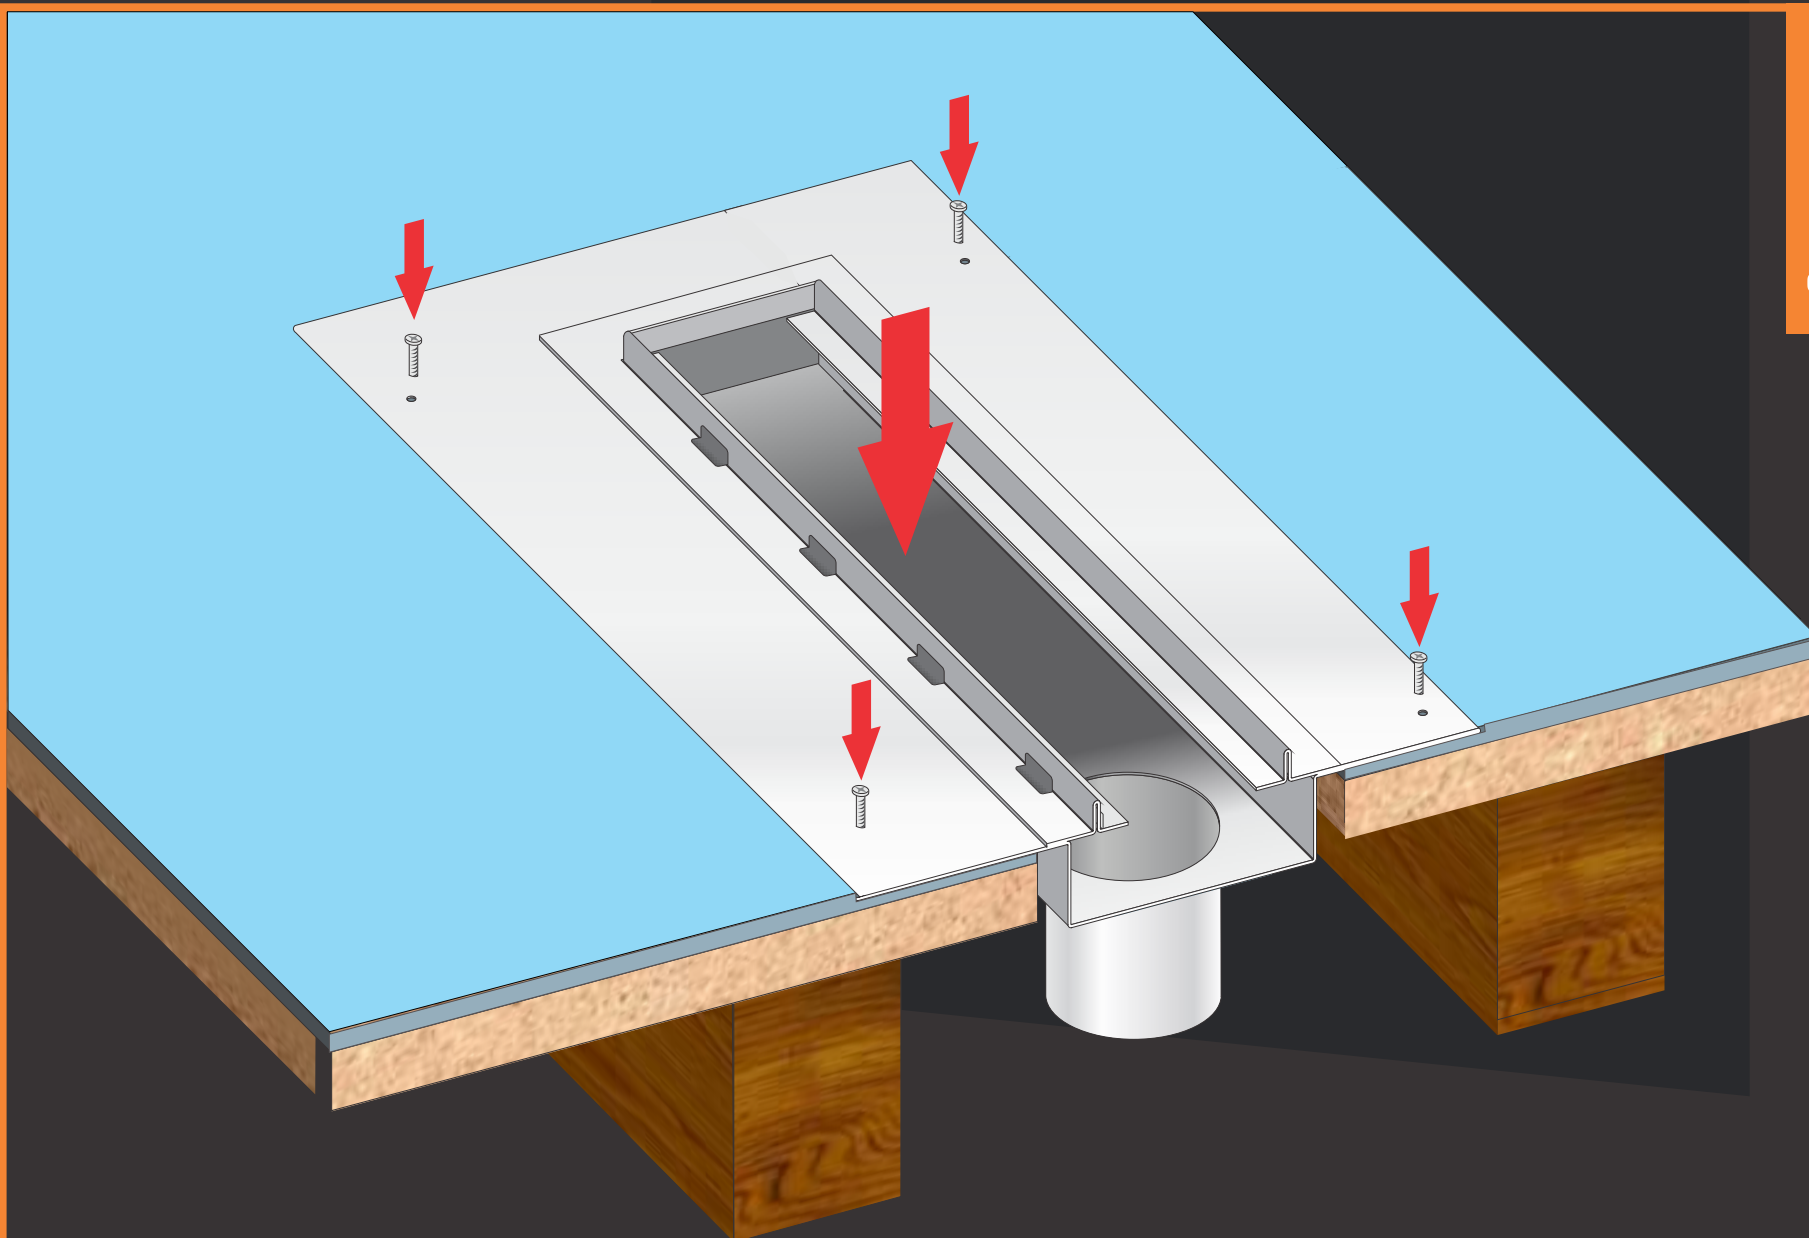

Install drain into place over Polyurethane adhesive/sealant and secure using supplied stainless steel screws, ensuring the drain is level.

Disclaimer: These drawings are the intellectual property of Creative Drain Solutions. This information is indicative only. Creative Drain Solutions accepts no liability arising from the use of this information.

ative Drain **Solutions**

Ph: (03) 9758 0588


createdrainsolutions.com.au



Creative Drain Solutions™

STEP

8

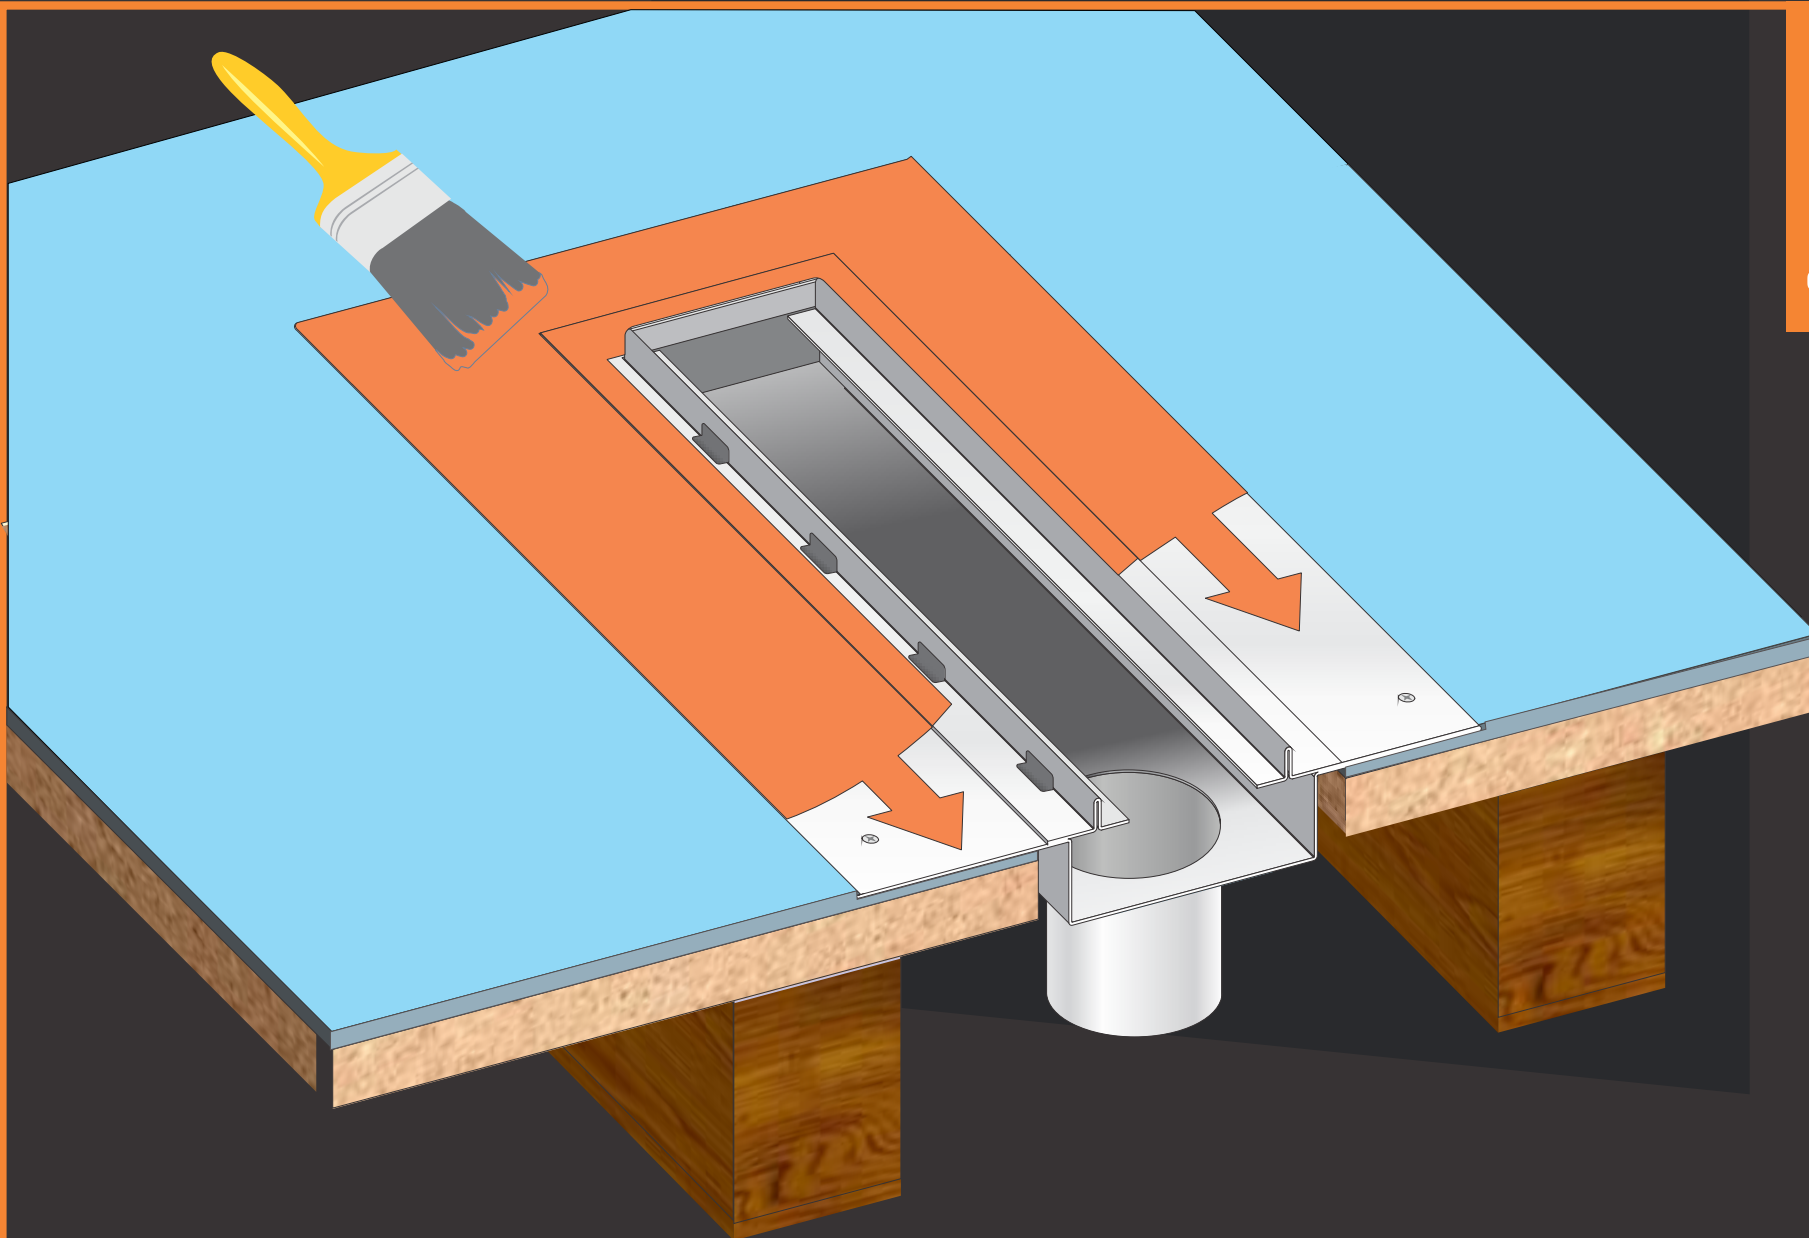

Apply a stainless steel primer to the floor flashings,
(we supply and recommend ATA- AUS
BOND ULTRE PRIME) as per manufacturers installation instructions.

Disclaimer: These drawings are the intellectual property of Creative Drain Solutions. This information is indicative only. Creative Drain Solutions accepts no liability arising from the use of this information.


ative Drain **Solutions**



Creative Drain Solutions™

STEP

9

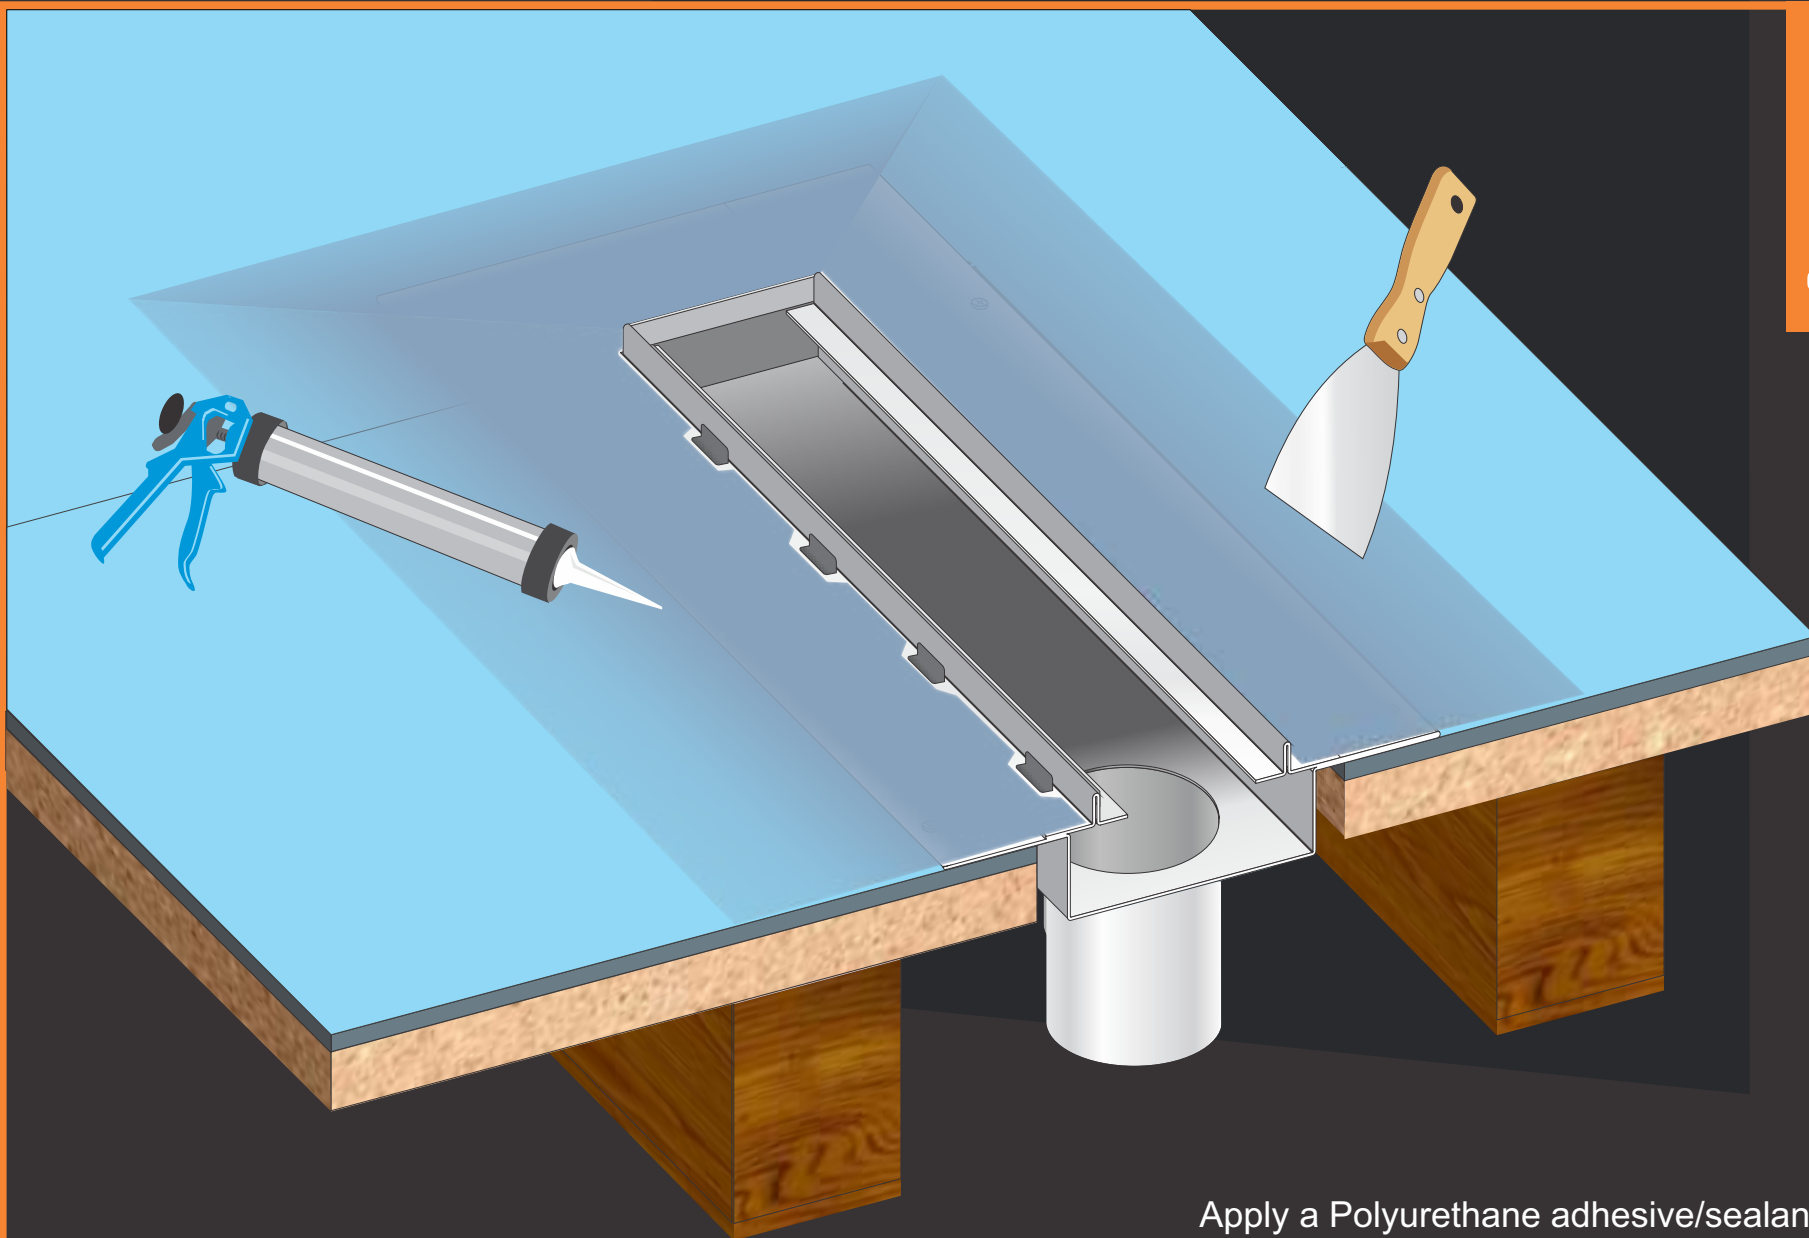

Apply a Polyurethane adhesive/sealant into remaining recess area and over the drain flashing, (ensuring the slot weep holes are not covered) feather to a flat finish using a spatula or similar.

Disclaimer: These drawings are the intellectual property of Creative Drain Solutions. This information is indicative only. Creative Drain Solutions accepts no liability arising from the use of this information.

reative Drain **Solutions**

Ph: (03) 9758 0588

createdrainsolutions.com.au



Creative Drain Solutions™

STEP

10



Create fall to the drain as required using a screed compound or similar and apply a second coat of waterproofing compound over the finished surface (ensuring the slot weep holes are not covered).

Disclaimer: These drawings are the intellectual property of Creative Drain Solutions. This information is indicative only. Creative Drain Solutions accepts no liability arising from the use of this information.

Creative Drain **Solutions**

Ph: (03) 9758 0588

createdrainsolutions.com.au



Creative Drain Solutions™

STEP

11



Trowel mortar with a V-notch or Square notch trowel in direction of fall, being cautious to follow manufacturers specifications.

Ensure weep holes are kept clear of mortar.

Use a removable spacer (MDF, plastic or similar) along the tile retention lip edge to space tiles away from edge.

Disclaimer: These drawings are the intellectual property of Creative Drain Solutions. This information is indicative only. Creative Drain Solutions accepts no liability arising from the use of this information.

Creative Drain **Solutions**

Ph: (03) 9758 0588


creativedrainsolutions.com.au



Creative Drain Solutions™

STEP

12

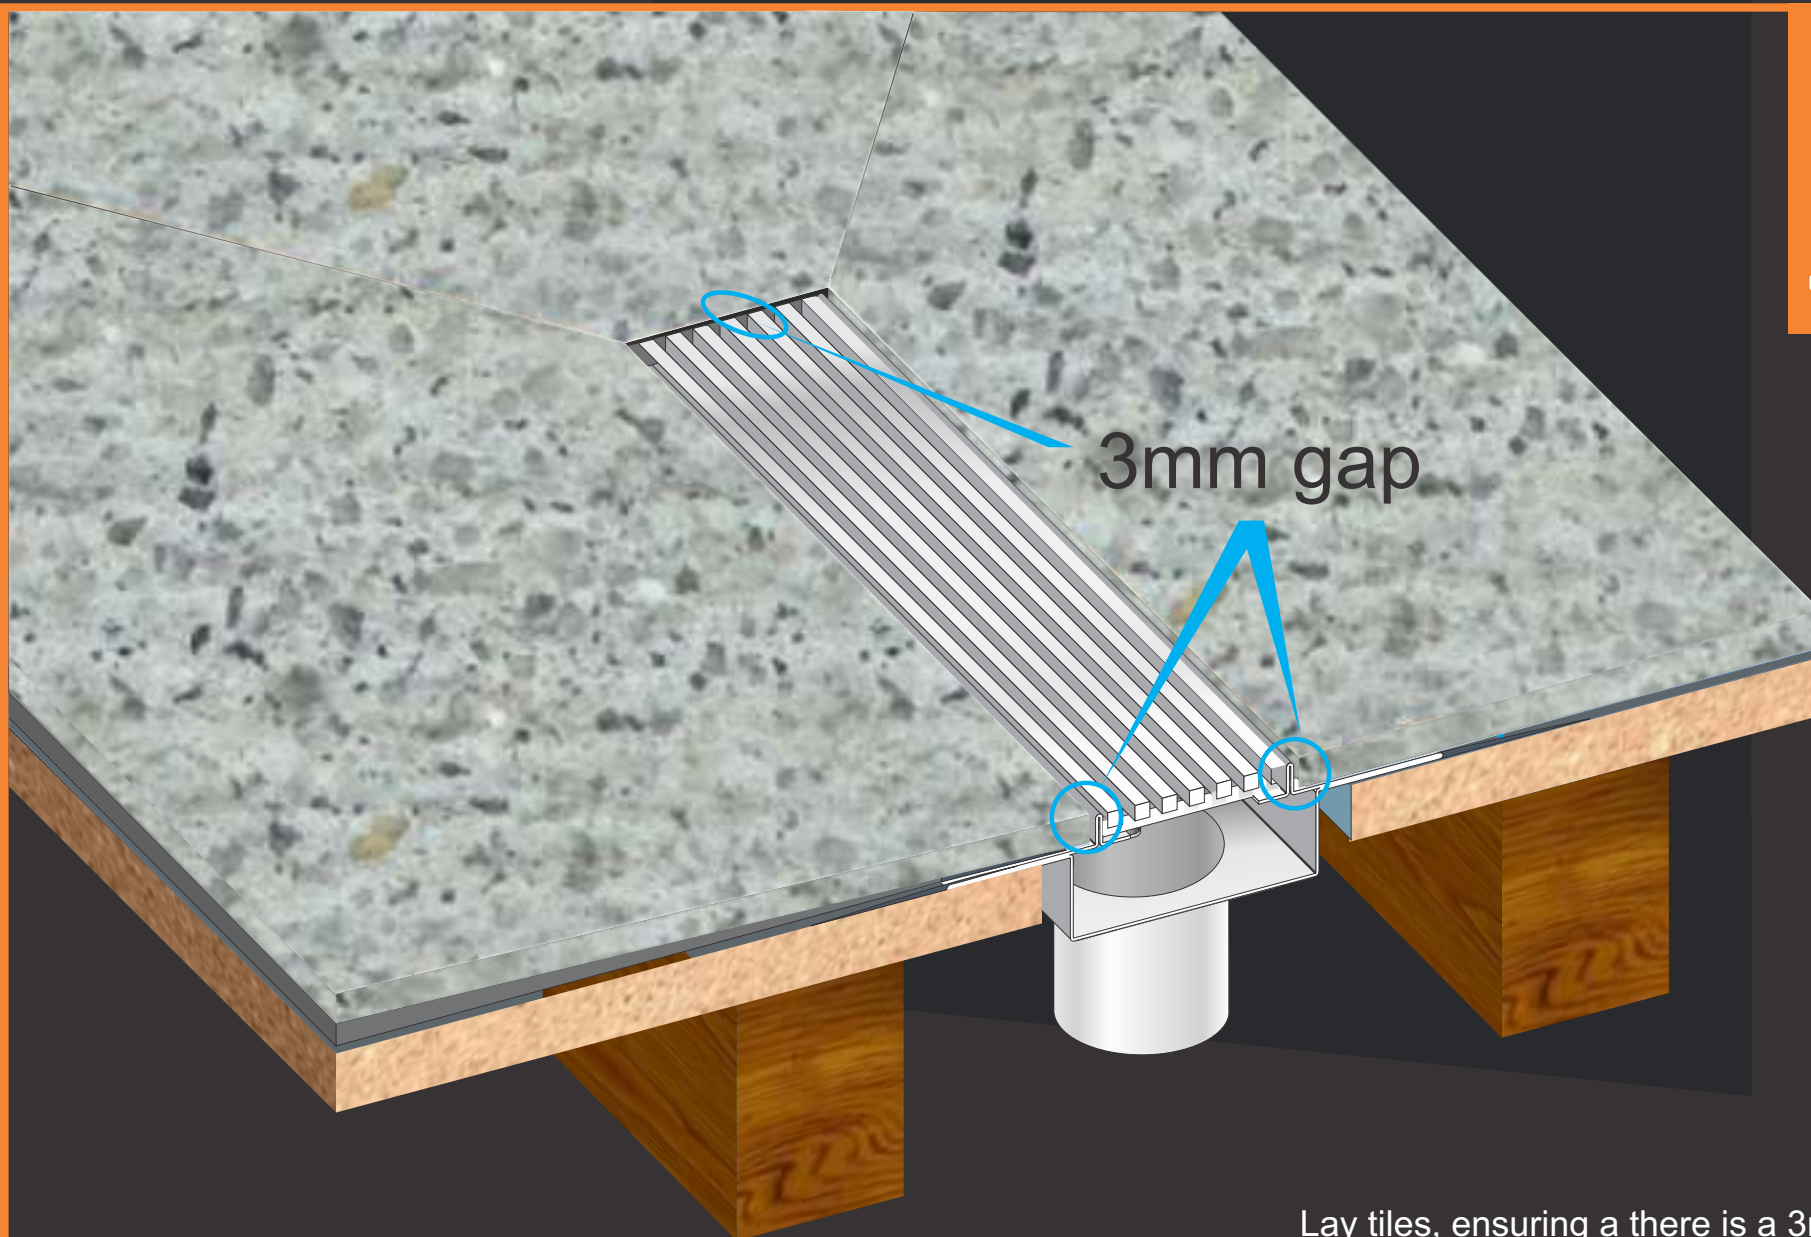

Lay tiles, ensuring a there is a 3mm gap between the tile edge and the tile lip. Apply and install colour matched silicone between tile edge and stainless steel tile lip. Install grate.

Disclaimer: These drawings are the intellectual property of Creative Drain Solutions. This information is indicative only. Creative Drain Solutions accepts no liability arising from the use of this information.

Creative Drain **Solutions**

Ph: (03) 9758 0588

creativedrainsolutions.com.au